

PRELIMINARY

SPEAKER SYSTEMS

ITEC GS15/1,4



 **ITEC**
itec-audio.com



Designed and Manufactured by
ITEC Tontechnik und
Industrietechnik GmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC GS15/1,4


SPECIFICATIONS

- High-performance PA loudspeaker with 1x15"/1,4" neodymium components
- Elegant 2-way full-range loudspeaker in a wooden housing with 1x15" neodymium low-mid speaker and 1,4" compression driver and horn▫ Homogenes Abstrahlverhalten
- Integrated crossover with passive filtering for runtime and phase optimization.
- Connection terminal 2x Speakon
- Mounting bracket, optional pan-tilt bracket
- Highly permeable, powder-coated loudspeaker cover made of galvanized steel
- Material: birch plywood with polyurea coating, glued waterproof, in black (RAL 9011) or white (RAL 9010), weatherproof, ball impact resistant



ITEC GS15/I,4

DIMENSIONS

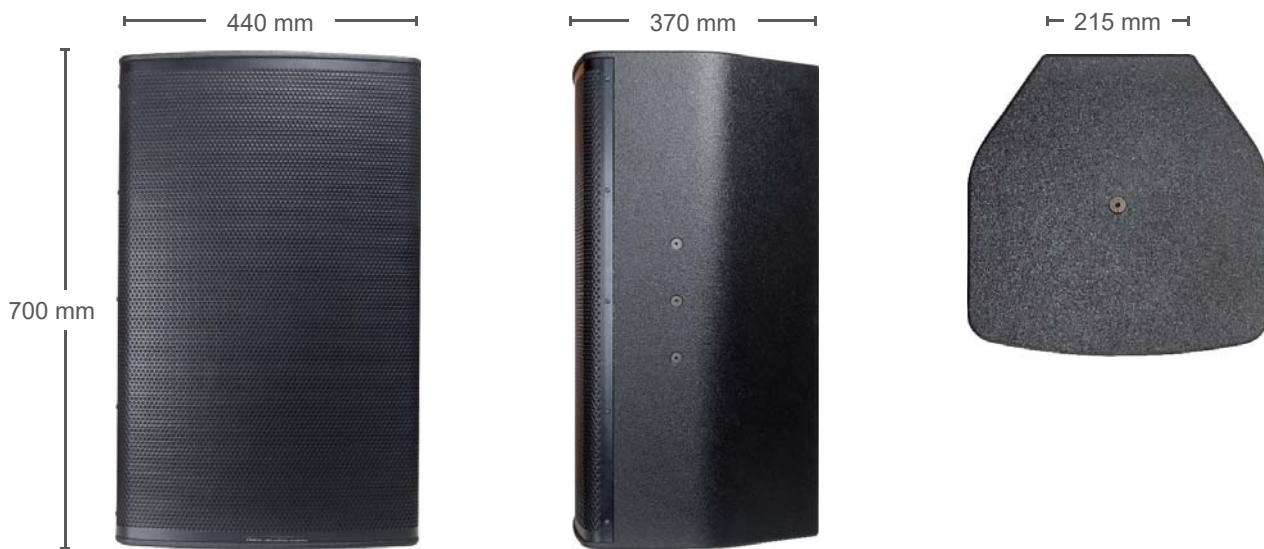

CONNECTION TERMINAL

2x Speakon



MOUNTING ACCESSORIES

Mounting bracket



Swivel bracket




ITEC GS15/1,4

TECHNICAL SPECIFICATIONS

MODEL	GS15/1,4
Power rating	700 W / 1400 W
Nominal sound pressure	94.5 dB SPL / 2.83 V / 1 m
Max. sound pressure	125 dB SPL
Frequency response -6 dB	64 Hz - 20 kHz
Impedance	8 Ohm
Driver	1x15 Low midrange speakers (3" VC), 1,4" Compression-Driver, Opening angle: horizontal 90 ° / vertical 40 °, horn rotatable
Dimensions (W x H x D)	440 mm x 700 mm x 370 mm
Weight	approx. 23 kg
Housing	Birch plywood
Coloring	Polyurea coating in black or white

Data Shown: GS15-14 (ITEC Tontechnik GesmbH)
Display Parameters: Frequency: 1000Hz (1/24th Octave) Mer: 0° Par: 0°

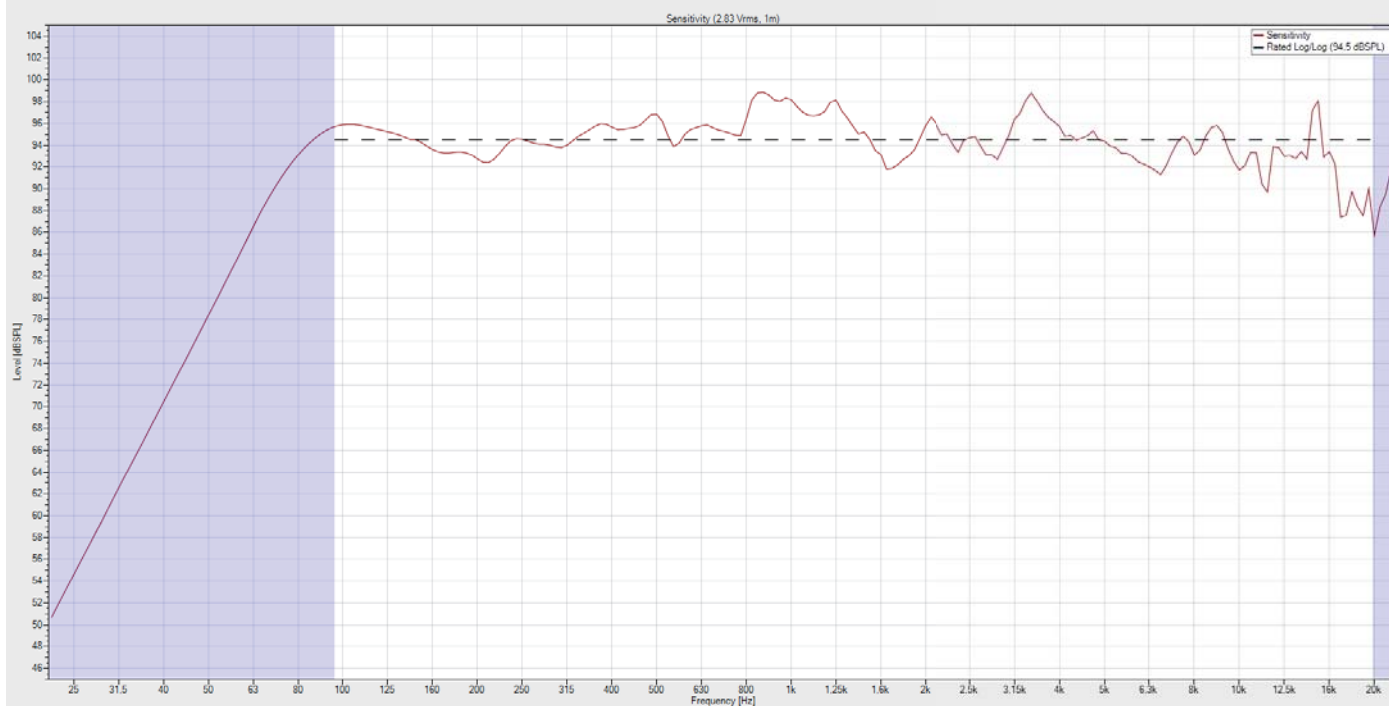

All Information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com