


SPEAKER SYSTEMS  
**ITEC GS5/4**



 **ITEC**  
itec-audio.com

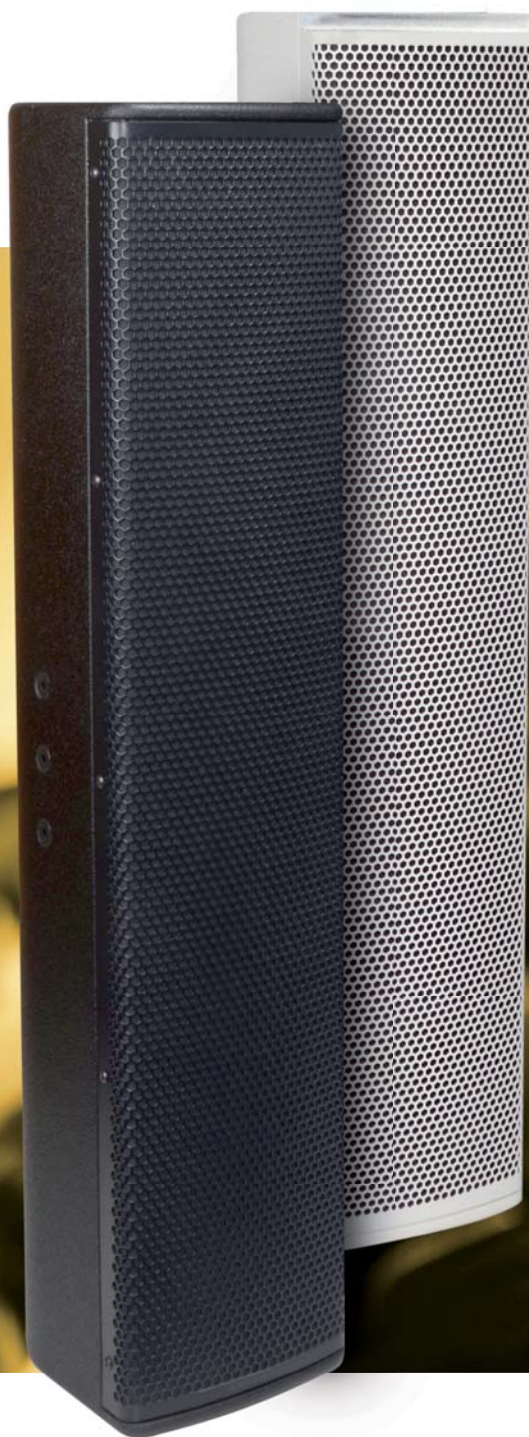

Designed and Manufactured by  
ITEC Tontechnik und  
Industrieelektronik GesmbH  
8200 Gleisdorf, Laßnitzthal 300  
Austria / Europe

# ITEC GS5/4

## SPECIFICATIONS

- High-performance PA loudspeaker
- Elegant 2-way full-range loudspeaker in a wooden housing with 4x5" low-mid speaker and 1.4" compression driver with horn 120° x 60°, horn rotatable through 180°
- Homogeneous radiation behavior
- Integrated crossover with passive filtering for runtime and phase optimization.
- Connection terminal 2x Speakon
- Optional: swivel bracket, pan-tilt bracket
- Highly permeable, powder-coated loudspeaker cover made of galvanized steel
- Material: birch plywood with polyurea coating, glued waterproof, in black (RAL 9011) or white (RAL 9010), weatherproof, ball impact resistant



# ITEC GS5/4

## DIMENSIONS



## CONNECTION TERMINAL

2x Speakon



## MOUNTING ACCESSORIES

Swivel bracket



Adapter plate for  
Pan / tilt bracket 30 °




Pan / tilt bracket 30 °



# ITEC GS5/4

## TECHNICAL SPECIFICATIONS

<b>MODEL</b>	<b>GS5/4</b>
Power rating	520 W / 1040 W
Nominal sound pressure	90,4 dB SPL / 2,83 V / 1 m
Max. sound pressure	120,4 dB SPL
Frequency response -6 dB	80 Hz - 20 kHz
Impedance	8 Ohm
Driver	4x5 Low midrange speakers (1,5" VC), 1,4" Compression-Driver, Horn 120° x 60°/rotatable 180°
Dimensions (W x H x D)	160 mm x 780 mm x 186 mm
Weight	ca. 11 kg
Housing	Birch plywood
Coloring	Polyurea coating in black or white

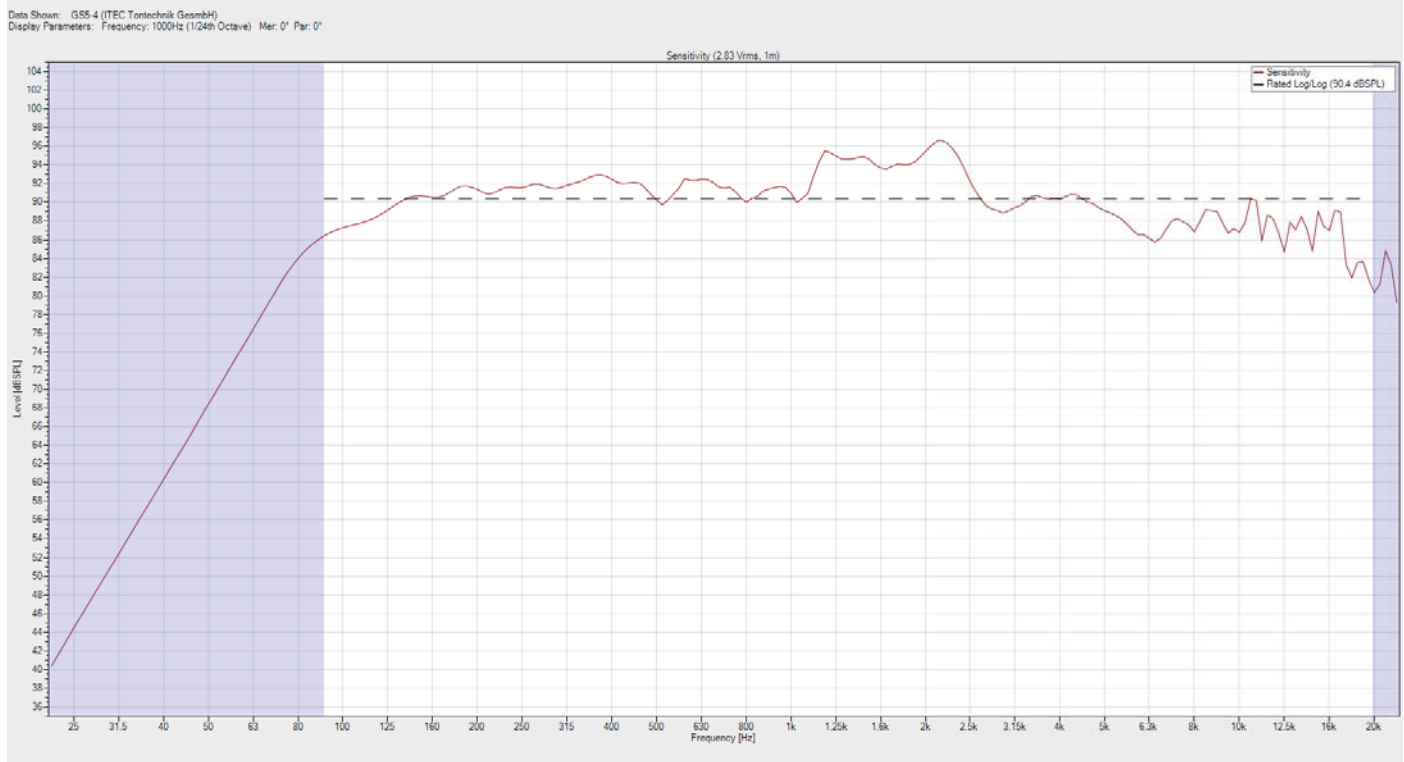

All Information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300  
Tel.: +43 (0)3133 / 3780-0, [office@itec-audio.com](mailto:office@itec-audio.com), [www.itec-audio.com](http://www.itec-audio.com)