

SPEAKER SYSTEMS

ITEC GS5/8



 **ITEC**
itec-audio.com



Designed and Manufactured by
ITEC Tontechnik und
Industrieelektronik GesmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC GS5/8

SPECIFICATIONS

- High-performance PA loudspeaker
- Elegant 2-way full-range loudspeaker in a wooden housing with 8x5" low-mid speaker and 1.4" compression driver with horn 120 ° x 60 °, horn rotatable through 180 °
- Homogeneous radiation behavior
- Integrated crossover with passive filtering for runtime and phase optimization.
- Connection terminal 2x Speakon
- Optional: pan-tilt bracket
- Highly permeable, powder-coated loudspeaker cover made of galvanized steel
- Material: birch plywood with polyurea coating, glued waterproof, in black (RAL 9011) or white (RAL 9010), weatherproof, ball impact resistant



ITEC GS5/8

DIMENSIONS



CONNECTION TERMINAL

2x Speakon



MOUNTING ACCESSORIES

Adapter plate for
Pan / tilt bracket 30 °



Pan / tilt bracket 30 °




ITEC GS5/8

TECHNICAL SPECIFICATIONS

MODEL	GS5/8
Power rating	1040 W / 2080 W
Nominal sound pressure	95.3 dB SPL / 2.83 V / 1 m
Max. sound pressure	125 dB SPL
Frequency response -6 dB	80 Hz - 20 kHz
Impedance	4 Ohm
Driver	8x5 Low midrange speakers (1.5" VC) 1.4" Compression-Driver, Horn 120° x 60°/rotatable 180°
Dimensions (W x H x D)	160 mm x 1310 mm x 186 mm
Weight	approx. 18 kg
Housing	Birch plywood
Coloring	Polyurea coating in black or white

Data Shown: GS5-8 (ITEC Tontechnik GesmbH)
Display Parameters: Frequency: 1000Hz (1/24th Octave) Mer: 0° Par: 0°

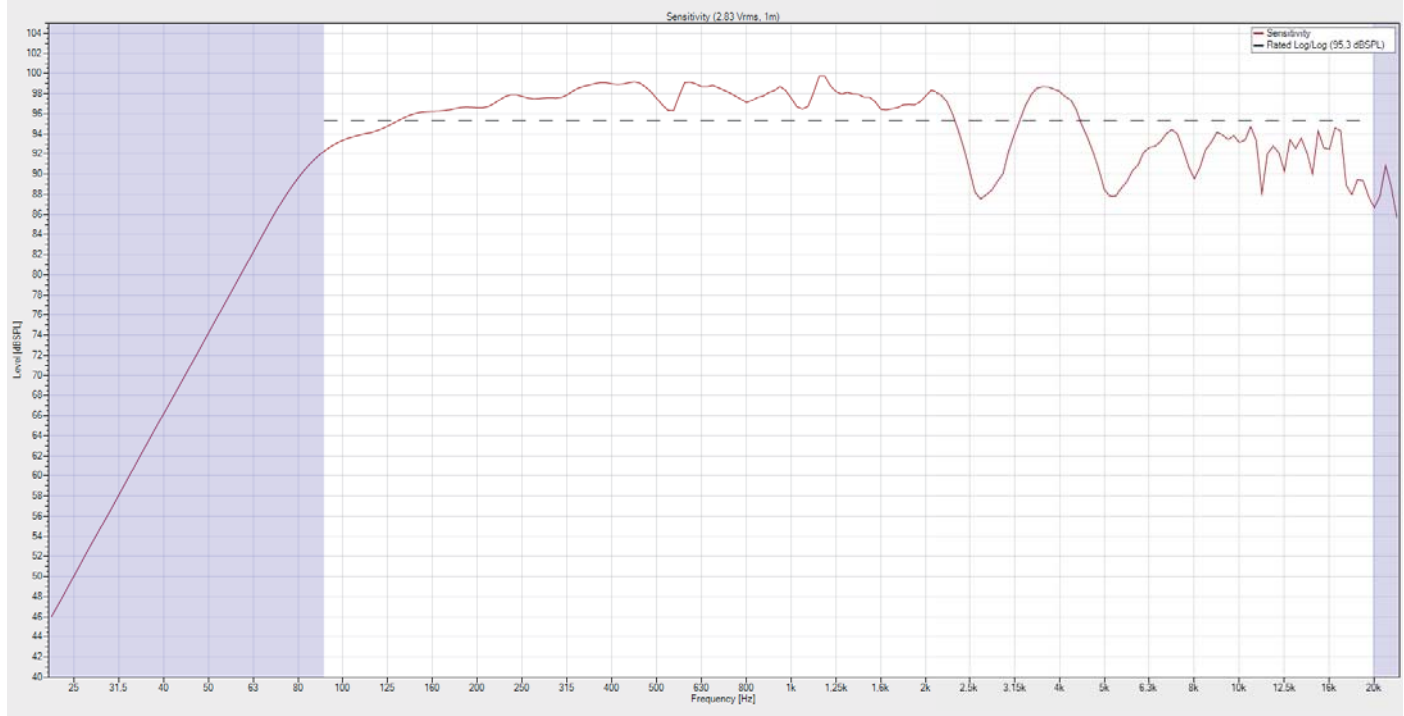

All Information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com