

SPEAKER SYSTEMS

ITEC GS6/I



 **ITEC**
itec-audio.com



Designed and Manufactured by
ITEC Tontechnik und
Industrieelektronik GesmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC GS6/ I

SPECIFICATIONS

- High-performance PA loudspeaker
- Elegant 2-way full-range loudspeaker in a wooden housing with 1x6" neodymium low-mid speaker and 1" compression driver and horn
- Homogeneous radiation behavior
- Integrated crossover with passive filtering for runtime and phase optimization.
- Connection terminal 2x Speakon
- Optional: mounting bracket, swivel bracket, pan-tilt bracket
- Highly permeable, powder-coated loudspeaker cover made of galvanized steel
- Material: birch plywood with polyurea coating, glued waterproof, in black (RAL 9011) or white (RAL 9010), weatherproof, ball impact resistant



ITEC GS6/1

DIMENSIONS



CONNECTION TERMINAL

2x Speakon



MOUNTING ACCESSORIES

Mounting bracket



Swivel bracket



Adapter plate for
Pan / tilt bracket 30 °



Pan / tilt bracket 30 °




ITEC GS6/1

TECHNICAL SPECIFICATIONS

MODEL	GS6/1
Power rating	200 W / 400 W
Nominal sound pressure	86.9 dB SPL / 2.83 V / 1 m
Max. sound pressure	111.4 dB SPL
Frequency response -6 dB	75 Hz - 20 kHz
Impedance	8 Ohm
Driver	1x6 Low midrange speakers (2" VC), 1" Compression-Driver, Opening angle: horizontal 60 ° / vertical 90 °, horn rotatable
Dimensions (W x H x D)	205 x 375 x 210 mm
Weight	approx. 6 kg
Housing	Birch plywood
Coloring	Polyurea coating in black or white

Data Shown: GS6-1 (ITEC Tontechnik GesmbH)
Display Parameters: Frequency: 1000Hz (1/24th Octave) Mer: 0° Par: 0°

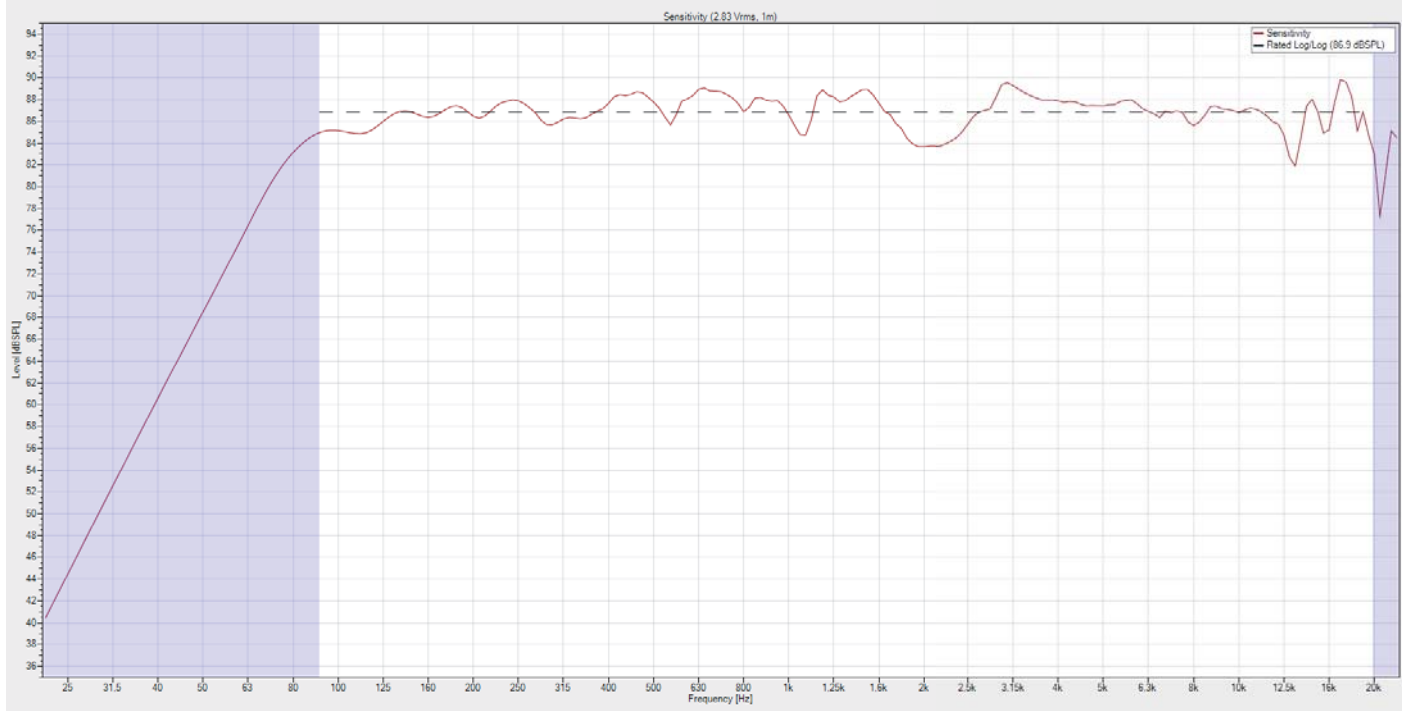

All Information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com