

**PRELIMINARY**

*SPEAKER SYSTEMS*  
**ITEC GS8/I**



 **ITEC**  
itec-audio.com



Designed and Manufactured by  
ITEC Tontechnik und  
Industrietechnik GmbH  
8200 Gleisdorf, Laßnitzthal 300  
Austria / Europe

# ITEC GS8/I

## SPECIFICATIONS

- High-performance PA loudspeaker with 1x8"/1" neodymium components
- Elegant 2-way full-range loudspeaker in a wooden housing with 1x8" neodymium low-mid speaker and 1" compression driver and horn
- Homogeneous radiation behavior
- Integrated crossover with passive filtering for runtime and phase optimization.
- Connection terminal 2x Speakon
- Mounting bracket, optional pan-tilt bracket
- Highly permeable, powder-coated loudspeaker cover made of galvanized steel
- Material: birch plywood with polyurea coating, glued waterproof, in black (RAL 9011) or white (RAL 9010), weatherproof, ball impact resistant



# ITEC GS8/1

## DIMENSIONS



## CONNECTION TERMINAL

2x Speakon



## MOUNTING ACCESSORIES

Mounting bracket



Swivel bracket



Pan / tilt bracket 30 °




# ITEC GS8/I

## TECHNICAL SPECIFICATIONS

| MODEL                    | GS8/1                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Power rating             | 200 W / 400 W                                                                                                             |
| Nominal sound pressure   | 91.2 dB SPL / 2.83 V / 1 m                                                                                                |
| Max. sound pressure      | 115.4 dB SPL                                                                                                              |
| Frequency response -6 dB | 75 Hz - 20 kHz                                                                                                            |
| Impedance                | 8 Ohm                                                                                                                     |
| Driver                   | 1x8 Low midrange speakers (2" VC),<br>1" Compression-Driver, Opening angle: horizontal 70° / vertical 90°, horn rotatable |
| Dimensions (W x H x D)   | 255 mm x 450 mm x 245 mm                                                                                                  |
| Weight                   | approx. 9,5 kg                                                                                                            |
| Housing                  | Birch plywood                                                                                                             |
| Coloring                 | Polyurea coating in black or white                                                                                        |

Data Shown: GS8-1 (ITEC Tontechnik GesmbH)  
Display Parameters: Frequency: 1000Hz (1/24th Octave) Mer: 0° Par: 0°

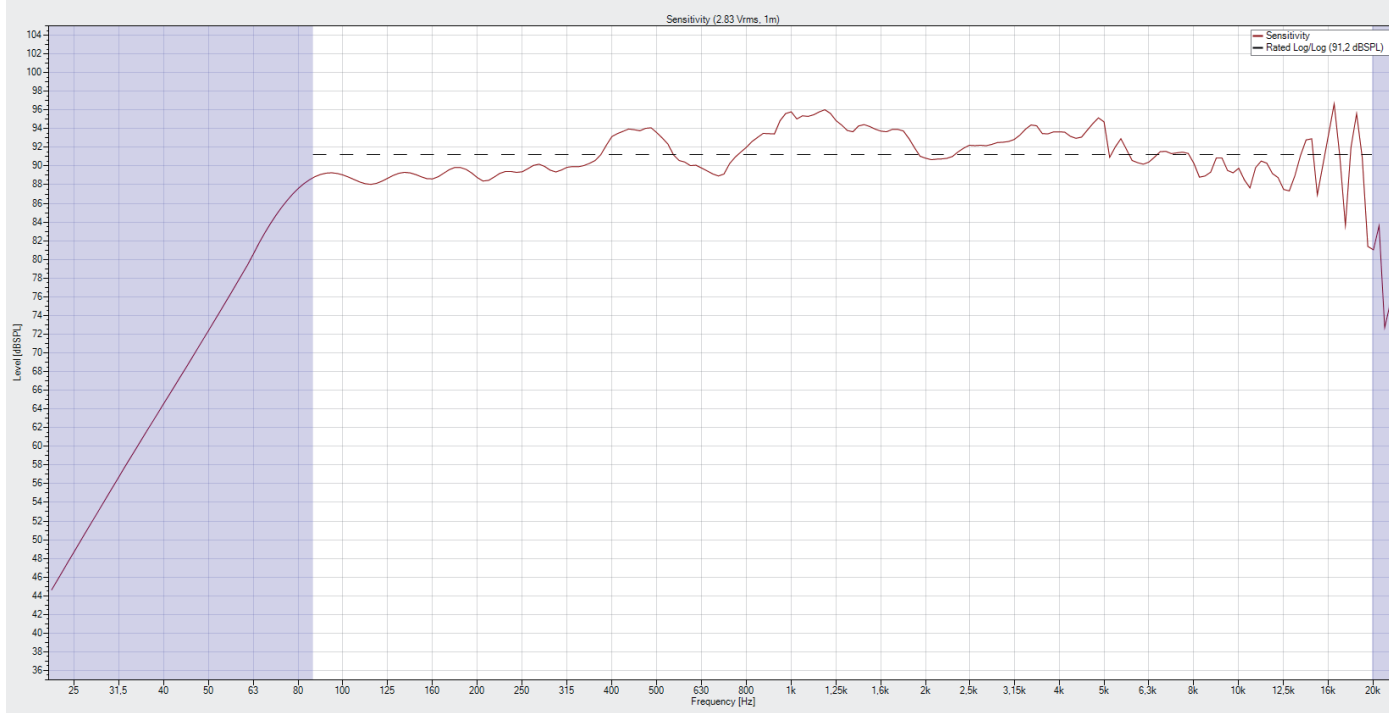

All Information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300  
Tel.: +43 (0)3133 / 3780-0, [office@itec-audio.com](mailto:office@itec-audio.com), [www.itec-audio.com](http://www.itec-audio.com)