
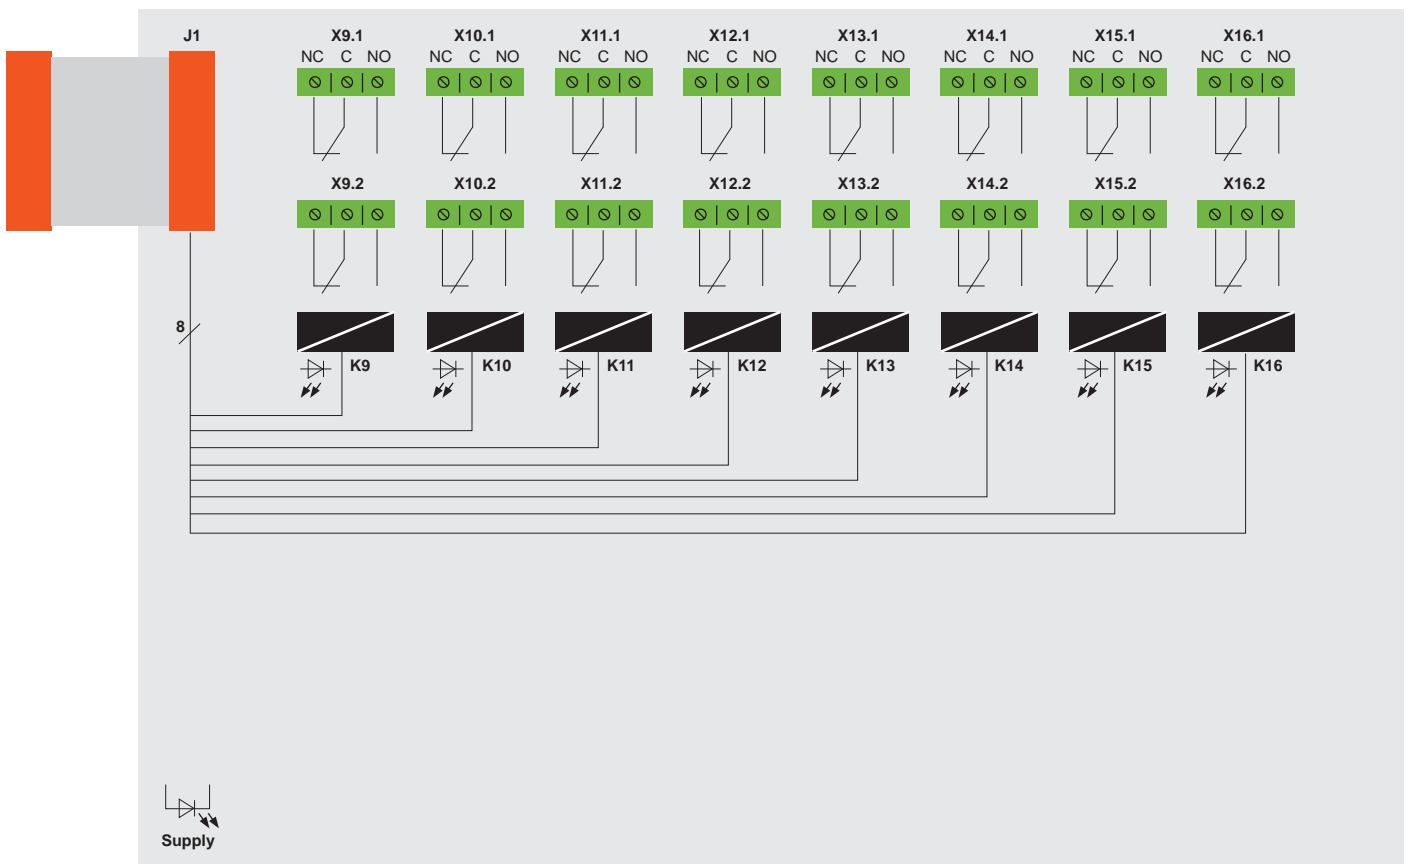


System component: I/O-EXPANDER RELAY EXTENSION

Features

- Relay expansion card for I/O-Relay-Expander and O-Relay-Expander
- 8 potential-free 2-pole change over switches (DPDT)

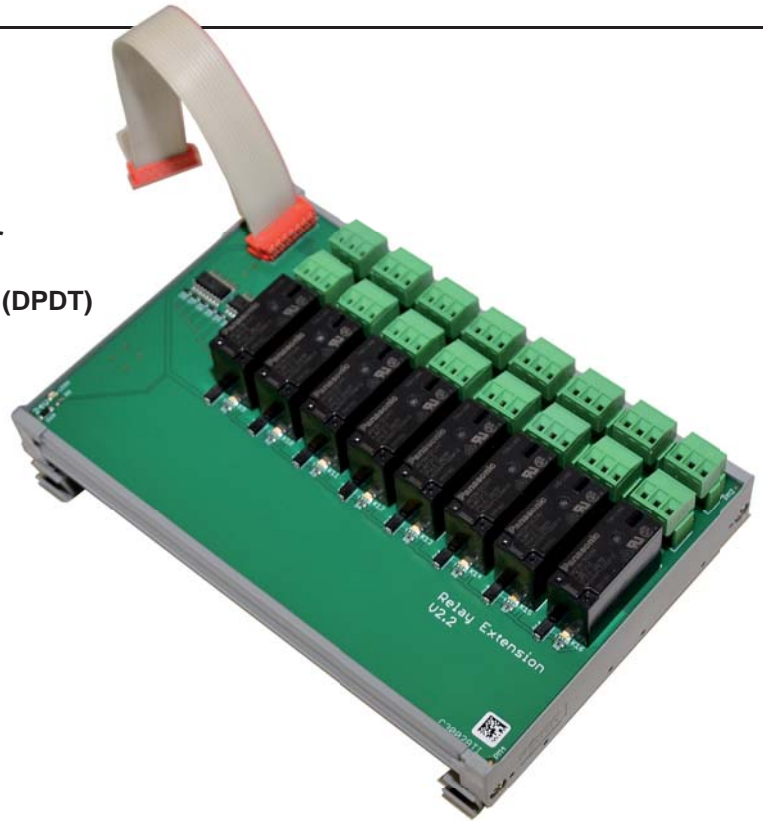

I/O-EXPANDER RELAY EXTENSION - SPECIFICATIONS

GENERAL	
Power consumption	20 mA per relay „ON“ (max. 160 mA)
Operating temperature	-5°C - +40°C
Dimensions (L x W x H)	162 mm x 106 mm x 47 mm
Weight	258 g
Mounting	Top hat rail DIN/EN60715 35 mm
RELAY OUTPUTS	
Max. external voltage	100 VAC (30 VDC)
Max. current per output	5 A
Isolation voltage	10 kV

All information without guarantee. Subject to technical changes.



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com