


SPEAKER SYSTEMS
ITEC IS-10



 **ITEC**
itec-audio.com

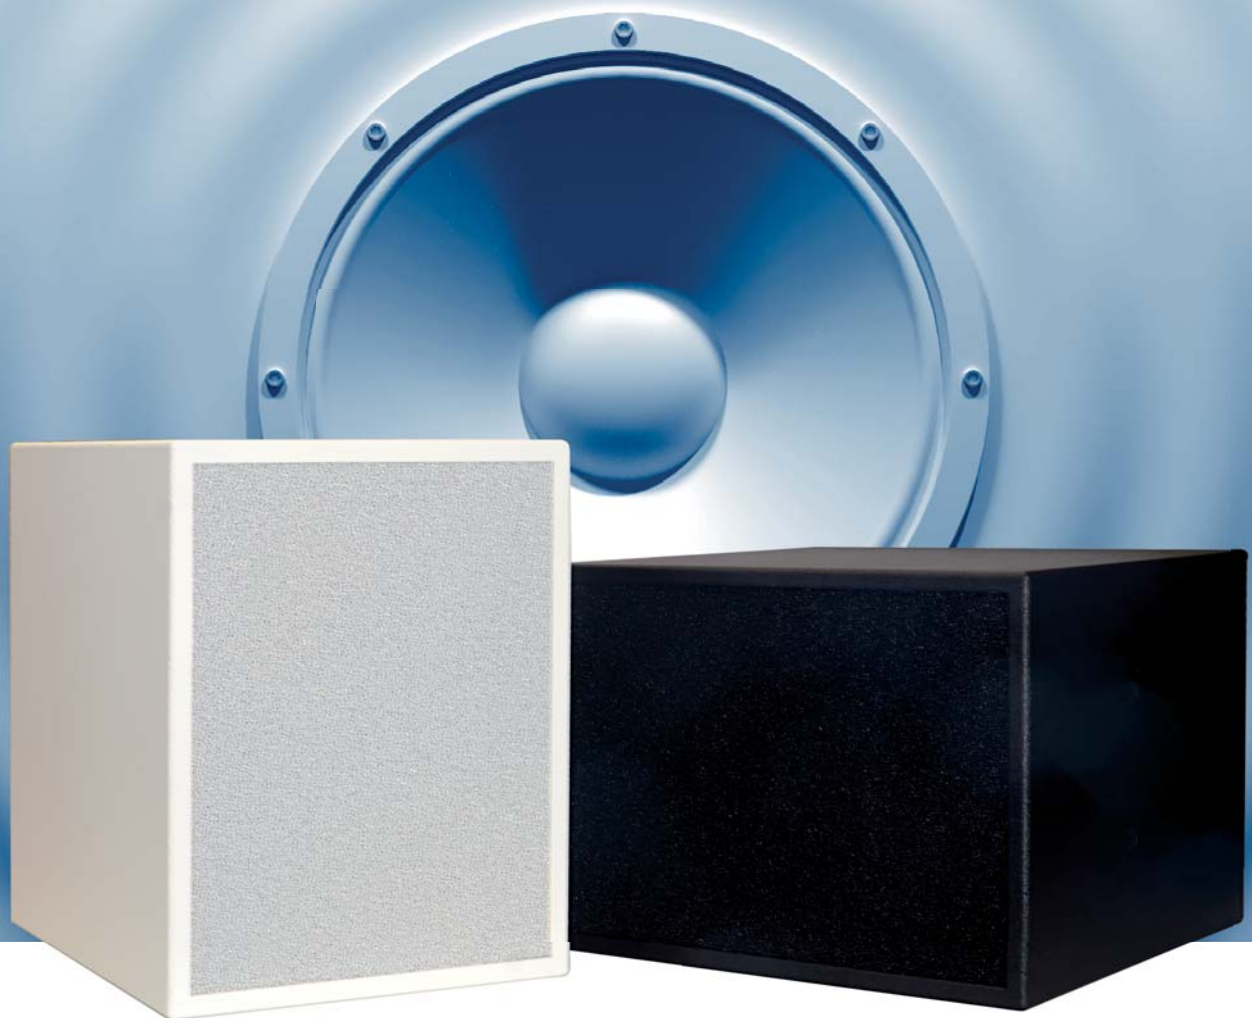

Designed and Manufactured by
ITEC Tontechnik und
Industrieelektronik GesmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC IS-10

SPECIFICATIONS

- Compact installation bass loudspeaker for wall or ceiling mounting, enclosed rubber feet for installation on the ground.
- 10 "neodymium bass driver, bass reflex system specially developed and matched for use with the ITEC Genuine and Powerceiling loudspeaker systems.
- Housing made of birch plywood, ball-proof loudspeaker cover covered with acoustic foam, weatherproof and UV-resistant PU coating (poly urea) black, 6x M8

PASSIVE VERSION

- Exchangeable connection panel including 2x Speakon sockets


ACTIVE VERSION

- Digital amplifier module with integrated digital signal processor (DSP)



ITEC IS-10

DIMENSIONS

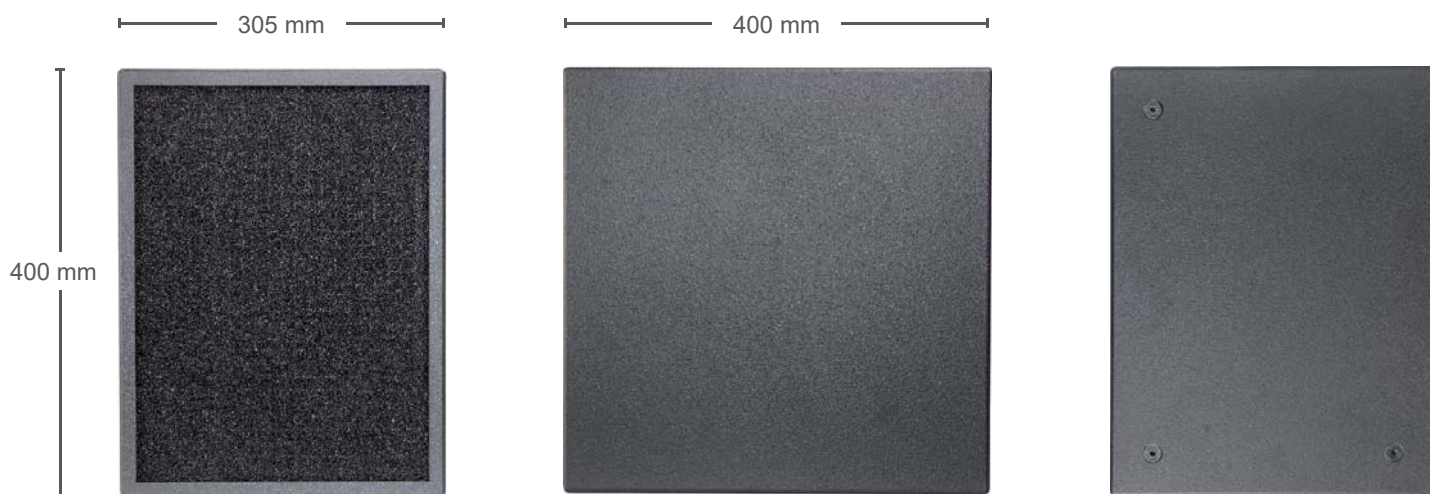

CONNECTION TERMINAL



ACTIVE VERSION



PASSIVE VERSION

MOUNTING ACCESSORIES

Rubber feet






Mounting bracket



ITEC IS-10

TECHNICAL SPECIFICATION

MODELS	IS-10 Active	IS-10 Passive
Nominal load		300 W _{RMS} / 600 W Program
Power	BTL 300W 2x150W	
System-Presets	4	
Nominal sound pressure (1W / 1m)		93 dB
Max.sound pressure (1m)		124 dB
Impedance		8 Ohm
Transmission range +/- 3dB	40 - 300 Hz	42 - 300 Hz
Presets	1) 25  150 Hz	-
	2) 25  120 Hz	
	3) 25  90 Hz	
	4) FLAT	
Dimensions (W x H x D)	305 mm x 400 mm x 400 mm	
Weight	ca. 17 kg	ca. 16 kg
Mounting	6x M8 flying points, 1x M8 for securing, 4 mounting brackets included	
Coloring	Textured PU coating, black RAL 9011, white RAL 9010	

All information without guarantee. Subject to technical changes



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Gleisdorf, Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com