

PRELIMINARY

SPEAKER SYSTEMS
ITEC IS-12



 **ITEC**
itec-audio.com



Designed and Manufactured by
ITEC Tontechnik und
Industrietechnik GmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC IS-12

SPECIFICATIONS

- Compact installation bass loudspeaker for wall or ceiling mounting, enclosed rubber feet for installation on the ground.
- 12" neodymium bass driver, bass reflex system specially developed and matched for use with the ITEC Genuine and Powerceiling loudspeaker systems.
- Housing made of birch plywood, ball-proof loudspeaker cover covered with acoustic foam, weatherproof and UV-resistant PU coating (poly urea) black, 6x M8

PASSIVE VERSION

- Exchangeable connection panel including 2x Speakon sockets

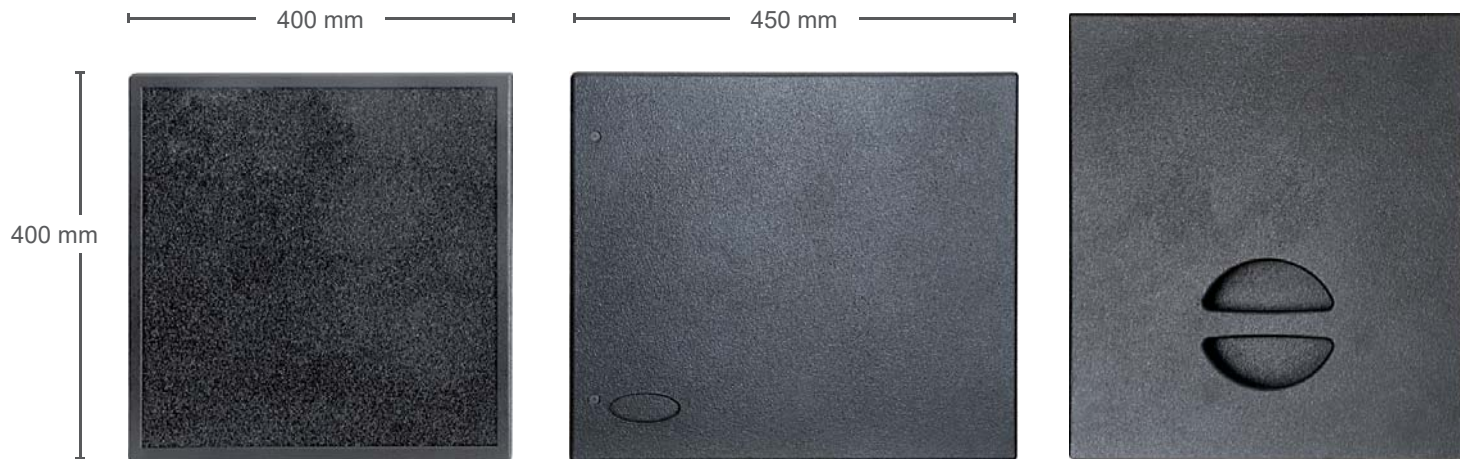
ACTIVE VERSION

- Digital amplifier module with integrated digital signal processor (DSP)



ITEC IS-12

DIMENSIONS



CONNECTION TERMINAL






ACTIVE VERSION



PASSIVE VERSION

ITEC IS-12

TECHNICAL SPECIFICATION

MODELS	IS-12 Active	IS-12 Passive
Nominal load		400W _{RMS} / 800W Programm
Power	BTL 300W 2x150W	
System-Presets	4	
Nominal sound pressure (1W / 1m)	92 dB	
Max.sound pressure (1m)	124 dB	
Impedance		8 Ohm
Transmission range +/- 3dB	36 - 300 Hz	36 - 300 Hz
Presets	1) 25  150 Hz	-
	2) 25  120 Hz	
	3) 25  90 Hz	
	4) FLAT	
Dimensions (W x H x D)	400 mm x 400 mm x 450 mm	
Weight	ca. 18 kg	ca. 17 kg
Mounting	6x M8 flying points, 1x M8 for securing, 4 mounting brackets included	
Coloring	Textured PU coating, black RAL 9011	

All information without guarantee. Subject to technical changes



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Gleisdorf, Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com