

SPEAKER SYSTEMS
ITEC IS-15



Designed and Manufactured by
ITEC Tontechnik und
Industrietechnik GmbH
8200 Gleisdorf, Laßnitzthal 300
Austria / Europe

ITEC IS-15

SPECIFICATIONS

- Compact installation bass loudspeaker for wall or ceiling mounting, enclosed rubber feet for installation on the ground.
- 15" neodymium bass driver, bass reflex system specially developed and matched for use with the ITEC Genuine and Powerceiling loudspeaker systems.
- Housing made of birch plywood, ball-proof loudspeaker cover covered with acoustic foam, weatherproof and UV-resistant PU coating (poly urea) black, 6x M8

PASSIVE VERSION

- Exchangeable connection panel including 2x Speakon sockets

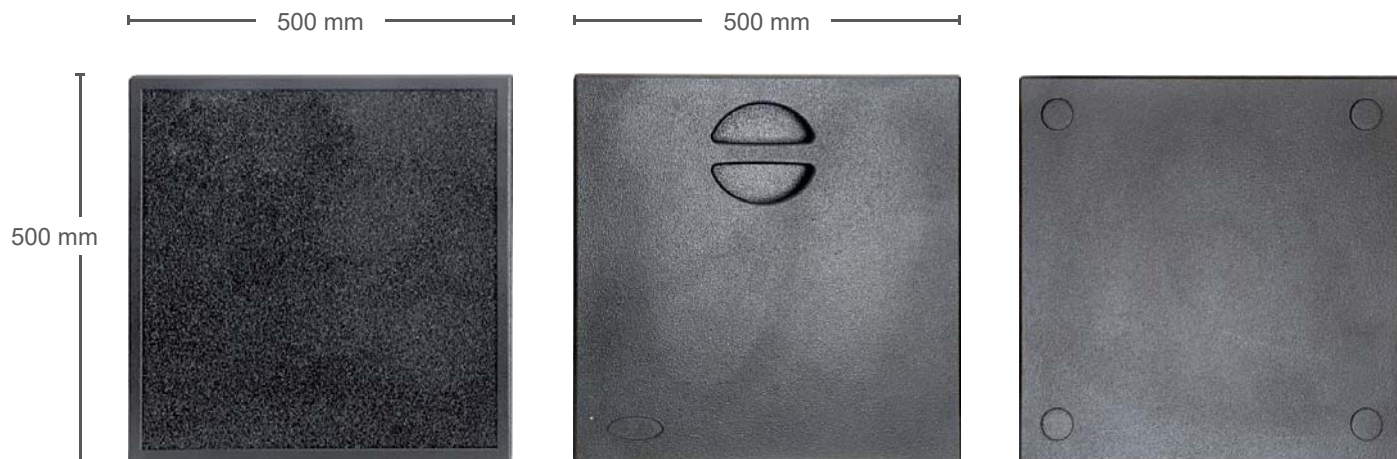
ACTIVE VERSION

- Digital amplifier module with integrated digital signal processor (DSP)



ITEC IS-15

DIMENSIONS






CONNECTION TERMINAL



ITEC IS-15

TECHNICAL SPECIFICATION

MODELS	IS-15 Active	IS-15 Passive
Nominal load		1200 W _{RMS} / 2400 W Programm
Power	BTL 1400W 2x750W	
System-Presets	4	
Nominal sound pressure (1W / 1m)	98 dB	
Max.sound pressure (1m)	124 dB	
Impedance		8 Ohm
Transmission range +/- 3dB	38 - 300 Hz	38 - 300 Hz
Presets	1) 25  150 Hz	-
	2) 25  120 Hz	
	3) 25  90 Hz	
	4) FLAT	
Dimensions (W x H x D)	500 mm x 500 mm x 500 mm	
Weight	ca. 26 kg	ca. 26 kg
Mounting	6x M8 flying points, 1x M8 for securing, 4 mounting brackets included	
Coloring	Textured PU coating, black RAL 9011	

All information without guarantee. Subject to technical changes



ITEC- Tontechnik und Industrieelektronik GesmbH, A-8200 Gleisdorf, Lassnitzthal 300
Tel.: +43 (0)3133 / 3780-0, office@itec-audio.com, www.itec-audio.com