


System component: SPM-DM Gooseneck Microphone



The dynamic ITEC SPM-DM gooseneck microphone for rooms with difficult acoustics

- Great cardioid characteristics
- Strong suppression of ambient noise
- Great dynamic range, wide frequency response range with minor distortions
- XLR connection

SPM-DM GOOSENECK MICROPHONE - SPECIFICATIONS

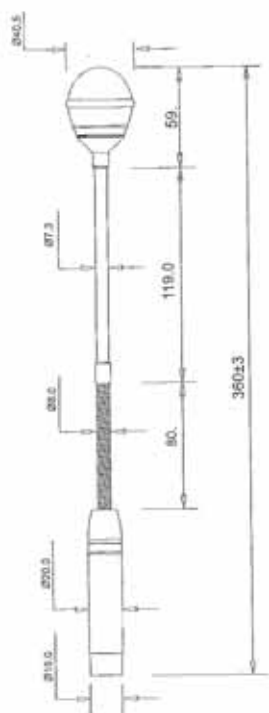

TYPE	Dynamic Microphone
POLAR PATTERN	Super Cardioid
FREQUENCY RESPONSE -6 dB	100 - 10.000 Hz
SENSITIVITY	-56 dB V/PA (1,58 m V/PA) ± 3dB 1Pa=94 dB SPL
RATED IMPEDANCE	500 Ohm
CONNECTOR	XLR/M
FINISH	Metal construction with black painted finish
ENVIRONMENTAL CONDITIONS	from -10°C to +50°C (14°F to 122°F)
DIMENSIONS	Ø 40,5 mm, L=360,0 mm
WEIGHT	170 g

All information without guarantee. Subject to technical changes.